

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

**THIS PAGE BLANK (USPTO)**




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04N 5/44</b>		<b>A2</b>	(11) International Publication Number: <b>WO 98/30023</b>
			(43) International Publication Date: 9 July 1998 (09.07.98)
(21) International Application Number: PCT/IB97/01599		(81) Designated States: CA, CN, JP, KR, MX, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 24 December 1997 (24.12.97)			
(30) Priority Data: 08/773,156 26 December 1996 (26.12.96) US		<b>Published</b> <i>Without international search report and to be republished upon receipt of that report.</i>	
(71) Applicant: PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).			
(71) Applicant (for SE only): PHILIPS NORDEN AB [SE/SE]; Kottbygatan 7, Kista, S-164 85 Stockholm (SE).			
(72) Inventor: CUCCIA, David; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).			
(74) Agent: SCHMITZ, Herman, J., R.; Internationaal Octrooibureau B.V., P.O. Box 220, NL-5600 AE Eindhoven (NL).			

## (54) Title: FAST EXTRACTION OF PROGRAM SPECIFIC INFORMATION FROM MULTIPLE TRANSPORT STREAMS

## (57) Abstract

A digital TV receiver suffers from latency when a channel change is made to a program in an other than the currently accessed transport stream (TS). That is because the transport decoder (202) must first acquire and decode the Program Specific Information (PSI) from the transport stream, such as the Program Association Table and Program Map Table. In accordance with the invention, a pre-decoder (203) is successively coupled to the other transport streams through a cross bar switch (204) to extract the PSI from said other streams and create a map of channels.

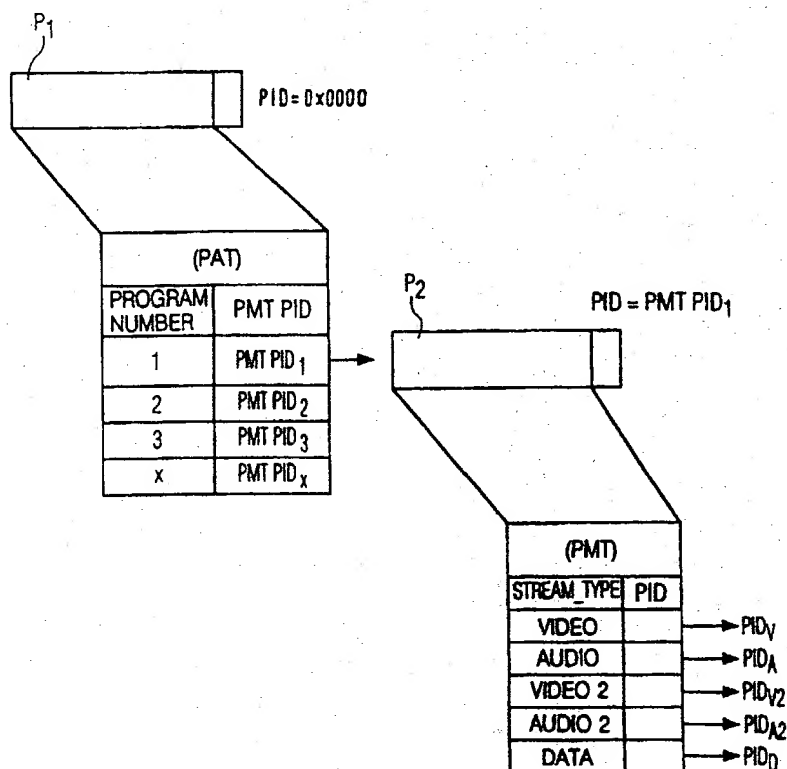

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

# FAST EXTRACTION OF PROGRAM SPECIFIC INFORMATION FROM MULTIPLE TRANSPORT STREAMS

## BACKGROUND OF THE INVENTION

### 1. Field of the Invention

The present invention relates to decoding systems for multiple transport streams, such as MPEG-2 (an international standard originated by the Moving Picture Experts Group) encoded data streams. In its particular respects, the present invention is directed to extraction of program specific information (PSI) from the multiple transport streams, to enable a so-called "channel change".

### 2. Description of the Related Art

As described in ISO/IEC 13818, a decoding system consisting of an MPEG-2 transport decoder, and elementary stream decoders including at least one MPEG-2 audio decoder and MPEG-2 video decoder may receive MPEG-2 transport streams (bitstreams) from multiple source types and/or multiple service providers. Any one MPEG-2 transport stream may contain multiple programs for presentation to the user. Thus, the action of switching from one program (or "channel") to another (usually described as a "channel change") may or may not necessitate switching from one transport stream source to another.

In the case where the data for the desired new channel is in the transport stream currently being received by the system decoder, the latency between selecting a new channel and displaying the new data to the user is limited only by the ability of the transport decoder and elementary stream decoders to resynchronize to the new data (which can be on a new time base as described in the ISO/IEC 13818 document). This latency should be rather small.

However, where a channel change requires selecting data that is not in the currently used transport stream, but in another transport stream, the latency is much greater. In such a case, the transport stream being fed to the transport decoder must be switched to a new transport stream. When this is done, the transport decoder cannot begin to parse and decode the program from the new transport stream until it has recovered program specific information (PSI) tables from the new stream. Since these tables are not sent frequently in any one transport stream, there can be a large delay in time before PSI table information arrives at the transport decoder for extraction. During this delay, no other decoding can be performed since basic information (such as where data is stored in the new stream, and what

type of data is present) about the stream is not available. Thus, a large channel change delay is incurred, which may be long enough to become annoying to the user.

5

### SUMMARY OF THE INVENTION

It is an object of the present invention to provide a decoding system and method in which the latency or delay of a channel change necessitating a change in which transport stream is decoded by the transport decoder is substantially reduced.

Briefly, this object is satisfied by the decoding system comprising, in  
10 addition to a transport decoder, a predecoder to access the transport stream sources, particularly those not currently being received by the transport decoder, to extract, store (in an appropriately located memory) and maintain updates on the PSI information from each stream. Then, when a channel change involves a change in transport streams fed to the transport decoder, the stored PSI information relevant to the new transport stream can be  
15 immediately supplied (i.e. downloaded) to the transport decoder. With the new PSI tables available immediately, the transport decoder can begin decoding the new bitstream immediately, thereby very substantially reducing the delay between a channel change and the display of new information to the user.

In accordance with the present invention, in order to provide for the  
20 selection of the transport stream being fed to the transport decoder and to successively feed the various transport streams to the predecoder (at least those streams not currently being fed to the transport decoder), the transport stream sources are connected to separate inputs of a coupling means, implemented as a fully populated crossbar switch, that can be dynamically reconfigured by a micro-controller connected to a control input thereof. The coupling means  
25 has one output connected to the predecoder and one output connected to the transport decoder.

In accordance with another aspect of the present invention, the mapping function (or map means) of the decoder system is augmented to use the PSI information extracted by the predecoder to construct a PSI and channel map for the superset of all  
30 transport stream sources connected to the system.

A method in accordance with the present invention comprises decoding data corresponding to a program from a first transport stream, during said decoding, extracting program specific information from a second transport stream, indicating a correspondence between packet ID numbers and data for programs in said stream, and using

the extracted program specific information in the event of a channel change necessitating that the second transport stream be decoded. The novel method further comprises extracting program specific information from a third transport stream during the decoding of the first transport stream, and using the extracted program specific information in the event of a  
5 channel change necessitating that the third transport stream be decoded.

Other objects, features and advantages of the present invention will become apparent upon perusal of the following detailed description when taken in  
10 conjunction with the appended drawing, wherein:

### BRIEF DESCRIPTION OF THE DRAWING

Figure 1 is a block diagram of a known decoding system for multiple transport streams:

15 Figure 2 is a block diagram of a decoding system for multiple transport streams in accordance with the invention;

Figure 3 illustrates the structure of a packet within a transport stream; and

Figure 4 is a chart illustrating steps in obtaining program information from packets of a transport stream.

20

### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring first to Figure 1 of the drawing, a known decoding system 100 is illustrated for multiple MPEG-2 transport streams TS1-TSn (ISO/IEC 13818-1 bitstreams). These transport streams may be supplied from different source types such as modems,  
25 asynchronous transfer mode (ATM) networks, and digital storage media (DSM) (or multiples of each) and/or from different service providers. Further, any one MPEG-2 encoded transport stream may contain multiple programs for presentation to the consumer.

In accordance with the MPEG-2 standard (ISO/IEC 13818), decoding system 100 comprises a transport decoder 102 having an output fed to elementary stream  
30 decoders (not shown) including at least one MPEG-2 audio decoder and MPEG-2 video decoder. In the known decoding system 100, transport streams TS1-TSn are applied to respective bitstream inputs of a multiplexer 104 which in response to a control signal applied to its control input 104a couples a selected one of the transport streams TS1-TSn to the input of transport decoder 102. Control input 104a is fed from a mapping function 106 of the host

processor of decoding system 100 (not shown) which maps channel number to transport stream source. Mapping function 106 is accessed in response to a channel change request issued from a user interface function 107 of the host processor. When the data for the new channel is located in the same transport stream as currently fed to the transport decoder 102, no change is made in the signal coupling state of the multiplexer 104. However, when data for the new channel is in another transport stream, the control signal applied to control input 104a causes multiplexer 104 to assume a different signal coupling state so that the new transport stream is input to transport decoder 102. At this point, the action of the decoder requires the extraction of program specific information (PSI) from the transport stream newly applied to the transport decoder. In order to understand the nature and time delay inherent in this extraction, the structure of packets in the transport stream will now be discussed.

As shown in Figure 3, each transport packet P in an MPEG-2 transport stream is 188 bytes in length and is composed of a packet header PH and a packet payload PP. When no adaptation field is present in the packet header PH, it is 4 bytes in length and the packet payload PP is 184 bytes in length. Within each header PH is a 13 bit packet identification number or PID. Packets containing data for a desired elementary stream or streams corresponding to a channel will have a unique PID which the transport decoder must demultiplex from the transport stream. However, *a priori*, the transport decoder has no knowledge of the specific PIDs it needs to read in the newly inputted transport stream to demultiplex the desired channel. It obtains this knowledge by extracting program specific information from the transport stream, which can involve a significant delay, on the order of seconds, which may be annoying to the user.

The cause for this delay will be understood with reference to Figure 4 which illustrates in a simplified form the steps for extraction of program specific information. As shown therein, the transport decoder must first wait for a transport packet P1 having the reserved PID 0x0000 for a packet which contains the Program Association Table (PAT). This table essentially relates program number to PIDs of packets containing a Program Map Table (PMT) for that program. A Program Map Table essentially relates the elementary stream types (video, audio, data etc.) in a program to PIDs of packets containing data for that stream type. Once the PID of the desired PMT is known, the transport decoder must wait for a packet P2 having that PID. Then, packet P2 is read to determine the PIDs of the desired stream types. Thereafter, with the acquired knowledge of the PIDs for the desired program elementary stream or streams, the data is demultiplexed and supplied to the elementary stream decoders.



It should further be understood that the Program Association Table and the Program Map Table are not necessarily wholly contained in single transport packets. In fact, they may be spread over multiple packets. Further, the transport packets containing table sections of the PAT and the PMT are typically spread over the transport stream; *i.e.* the transport packets containing these table sections do not arrive at the transport decoder immediately following one another, but rather arrive with many transport packets between successive PAT and PMT packets. In the worst case the PAT and then the PMT must be extracted and completely assembled from their respective sections spread over multiple packets before the desired program elementary streams can be accessed, resulting in excessive delay on the order of seconds in response to a channel change request necessitating a change in transport stream to be applied to the transport decoder.

In accordance with the present invention, as illustrated in Figure 2, a decoding system 200 is provided in which the delay in obtaining program specific information upon a channel change necessitating a change in transport stream is avoided. Therein, in addition to a transport decoder 202, a predecoder 203 is provided for extracting program specific information PSI from the transport streams TS1-TSn, and at least from all of the transport streams thereof not currently coupled to the transport decoder 202. The program specific information extracted by the predecoder 203 is then immediately made available to the transport decoder 202 via an interconnection 208 between them in the event of a channel change request from user interface 207 necessitating a change of the transport stream fed to transport decoder 202.

Both the coupling of a selected one of transport streams TS1-TSn to the input of transport decoder 202 and the successive coupling of the transport streams TS1-TSn to the input of predecoder 203 is preferably effected by a fully populated crossbar switch 204 which is dynamically reconfigurable in response to a control signal on its control input 204a from an 8-bit micro-controller 205. Crossbar switch 204 has inputs for the respective transport streams TS1-TSn and outputs to the transport decoder 202 and the predecoder 203. It should be understood that any dynamically reconfigurable one or more switch means which can attain the requisite signal coupling states can be used.

Predecoder 203 and micro-controller 205 are coupled by a bidirectional signal path 210 so that the micro-controller can inform the predecoder 203 which transport stream it has commanded the crossbar switch to convey to the predecoder and so that the predecoder can signal the micro-controller when it has completed extraction of program specific information from the newly coupled transport stream. Then, the micro-controller

commands the crossbar switch 204 to feed a different transport stream to the predecoder for the purpose of extraction of PSI. The changing of transport streams in this manner is repeated in "round robin" fashion so that the entire plurality of transport streams TS1 - TS<sub>n</sub> are successively applied to predecoder 203, enabling continual extracting and updating of

5 program specific information for all transport streams. The signal paths 210 and 208 are also used for the micro-controller 205 to inform the predecoder 203 and the predecoder to inform the transport decoder 202 which transport stream is currently being supplied to the transport decoder.

The predecoder may itself store program specific information for the  
10 plurality of transport streams TS1-TS<sub>n</sub> or that information may be conveyed for storage to other elements, e.g. micro-controller 205 or transport decoder 202. In an interesting case, the extracted PSI is conveyed via micro-controller 205 to the mapping function 206 of the host processor of decoding system 200 where it is used to store and maintain a global map of channel numbers to transport stream and associated PSI. Then, when a channel change  
15 request is issued from the user interface function 207 of the host processor, the applicable program specific information can be read from mapping function 206 and conveyed to transport decoder either via micro-controller 205 and predecoder 203 or directly via path 212.

While the present invention has been described in particular detail, it  
20 should also be appreciated that numerous modifications are possible within the intended spirit and scope of the invention. For example, elements of decoding system 200 may be integrated in a variety of ways with each other and communication between these elements may take various direct or indirect routes.

CLAIMS:

1. A decoding system for a plurality of transport streams comprising:  
a transport decoder (202) for decoding data corresponding to a program  
from a currently accessed transport stream of said plurality of transport streams;  
a predecoder (203) for extracting program specific information from  
5 another transport stream of said plurality of transport streams, said program specific  
information identifying the programs in said other stream;  
means for coupling a selected one of said plurality of transport streams to  
said transport decoder and another of said plurality of streams to said predecoder; and  
means for providing (206) the transport decoder with the program specific  
10 information extracted by the predecoder for use in the event of a channel change  
necessitating the coupling means coupling said another of said plurality of streams to said  
transport decoder.
2. A decoding system as claimed in Claim 1, wherein said coupling means  
has a plurality of inputs, each for a different one of said plurality of transport streams, and  
15 two outputs, one coupled to the transport decoder and the other coupled to the predecoder.
3. A decoding system as claimed in Claim 2, wherein said coupling means is  
configured for successively coupling at least all other of said transport streams to said  
predecoder.
4. A decoding system as claimed in Claim 2, wherein said coupling means is  
20 a fully populated cross bar switch having a control input, and further comprising a control  
means coupled to said control input.
5. A decoding system as claimed in Claim 1, further comprising means for  
constructing a map of channels and program specific information associated with channels  
using the program specific information extracted by said predecoder.
- 25 6. A decoding system as claimed in Claim 1, wherein said means for  
providing the transport decoder with the program specific information extracted by the  
predecoder includes said map means.
7. A decoding system as claimed in Claim 2, wherein said means for  
providing the transport decoder with the program specific information extracted by the

predecoder includes said map means.

8. A method of decoding a plurality of transport streams comprising:  
decoding data corresponding to a program from a first transport stream of  
said plurality of transport streams;

5 during said decoding, extracting program specific information from a  
second transport stream of said plurality of transport streams, said program specific  
information identifying the programs in said second transport stream; and  
using the extracted program specific information in the event of a channel  
change necessitating that said second transport stream be decoded.

10 9. A method of decoding as claimed in Claim 8, further comprising:  
extracting program specific information from a third transport stream of  
said plurality of transport streams during the decoding of the first transport stream; and  
using the extracted program specific information in the event of a channel  
change necessitating that said third transport stream be decoded.

15 10. A method of decoding as claimed in Claim 8, further comprising  
maintaining a map of channels and program specific information for the plurality of transport  
streams using the extracted program specific information.

1/4

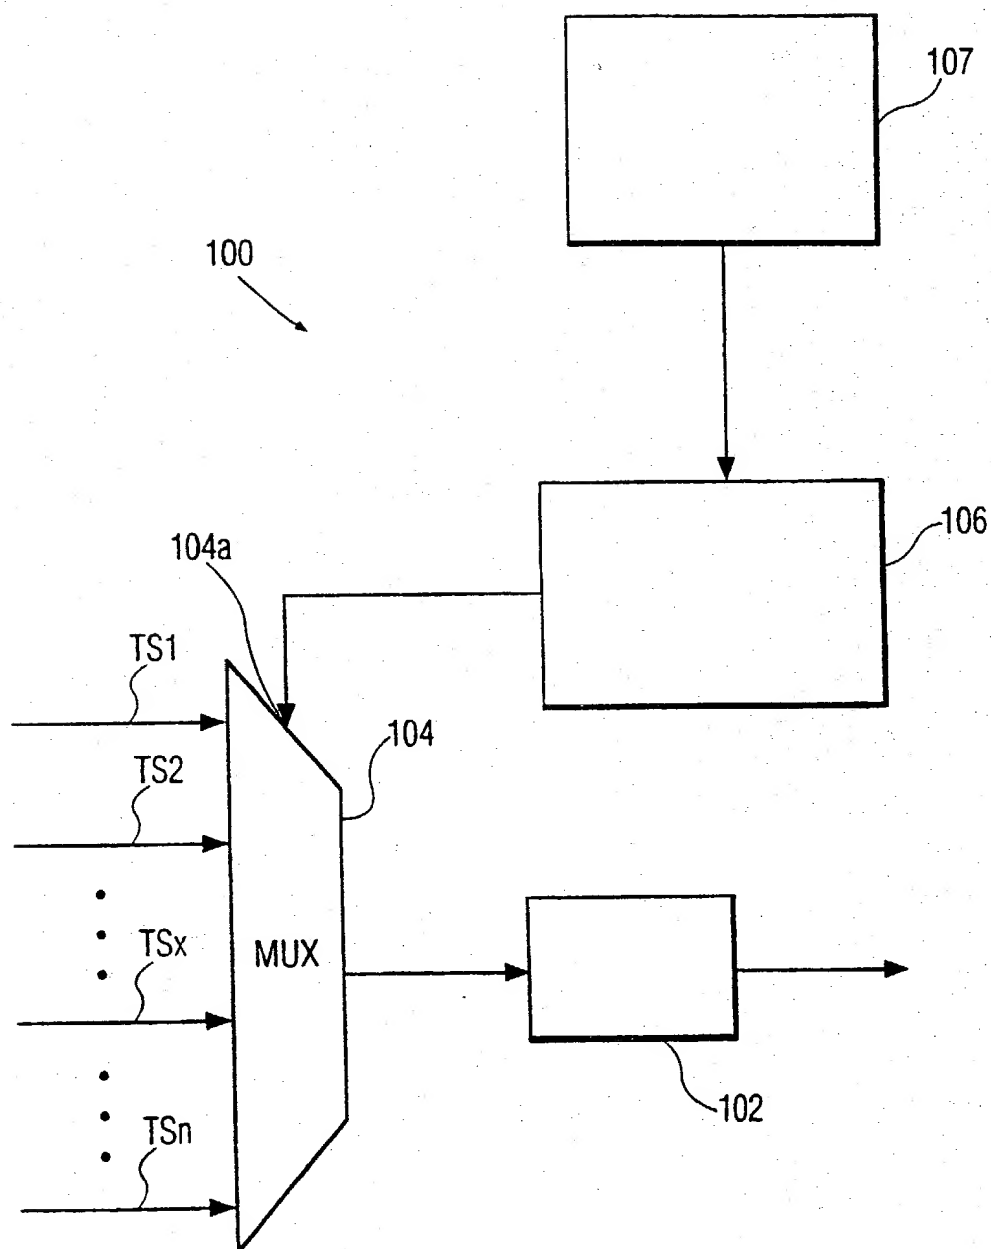


FIG. 1

2/4

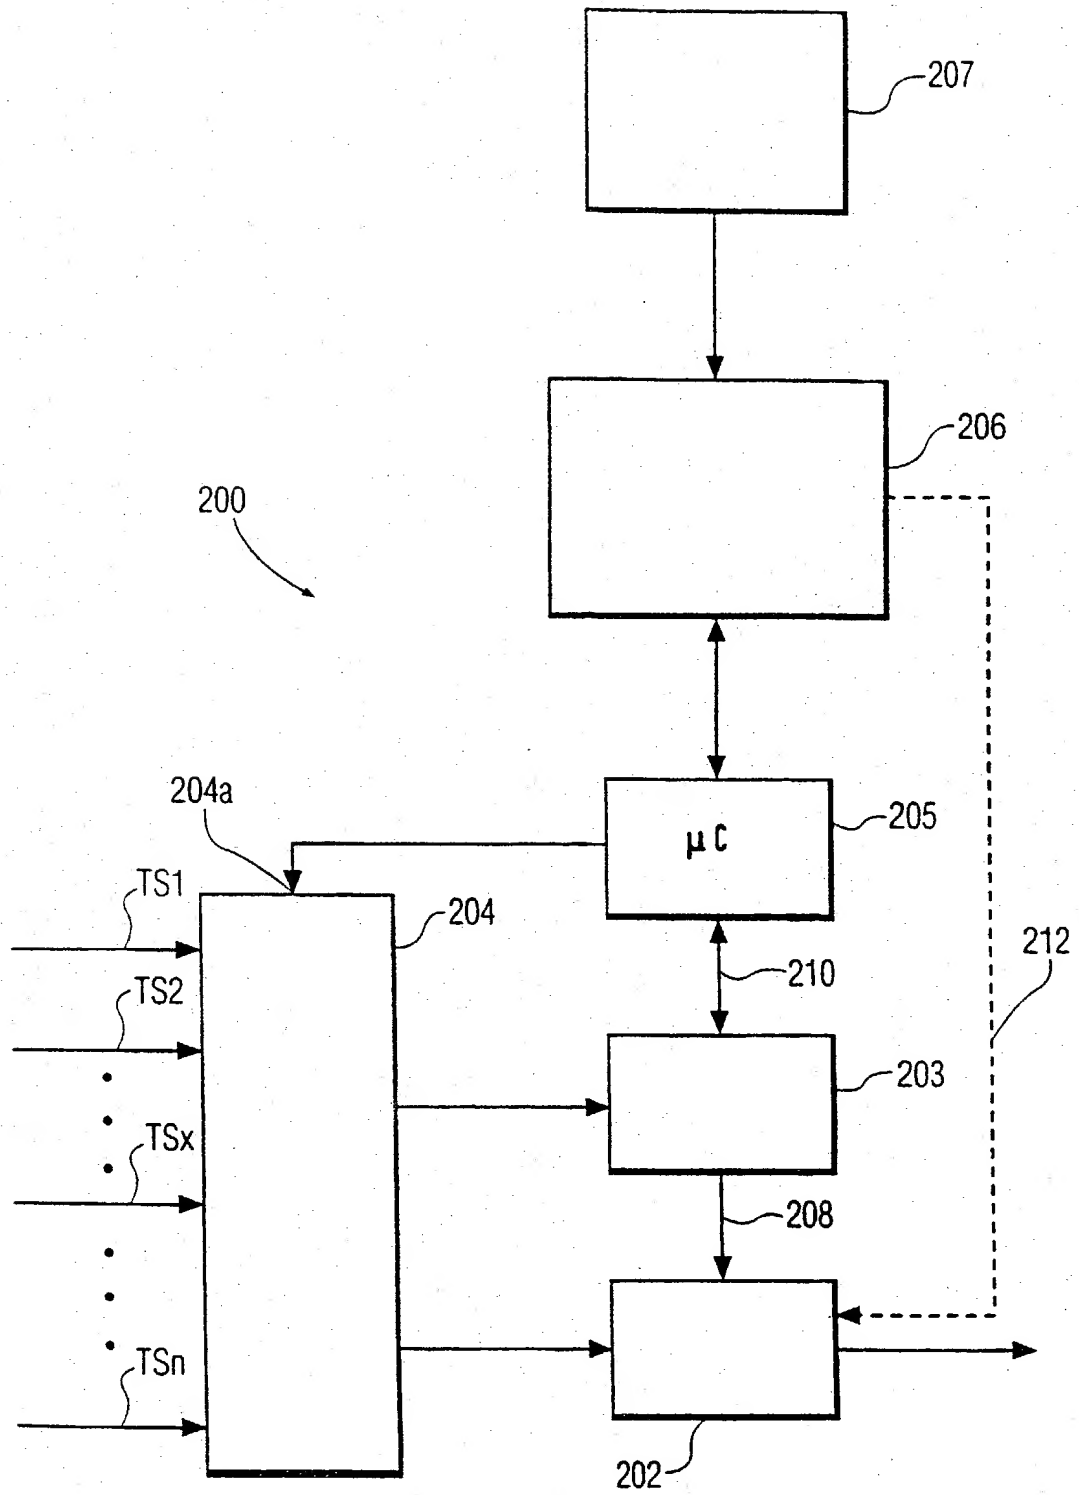


FIG. 2

3/4

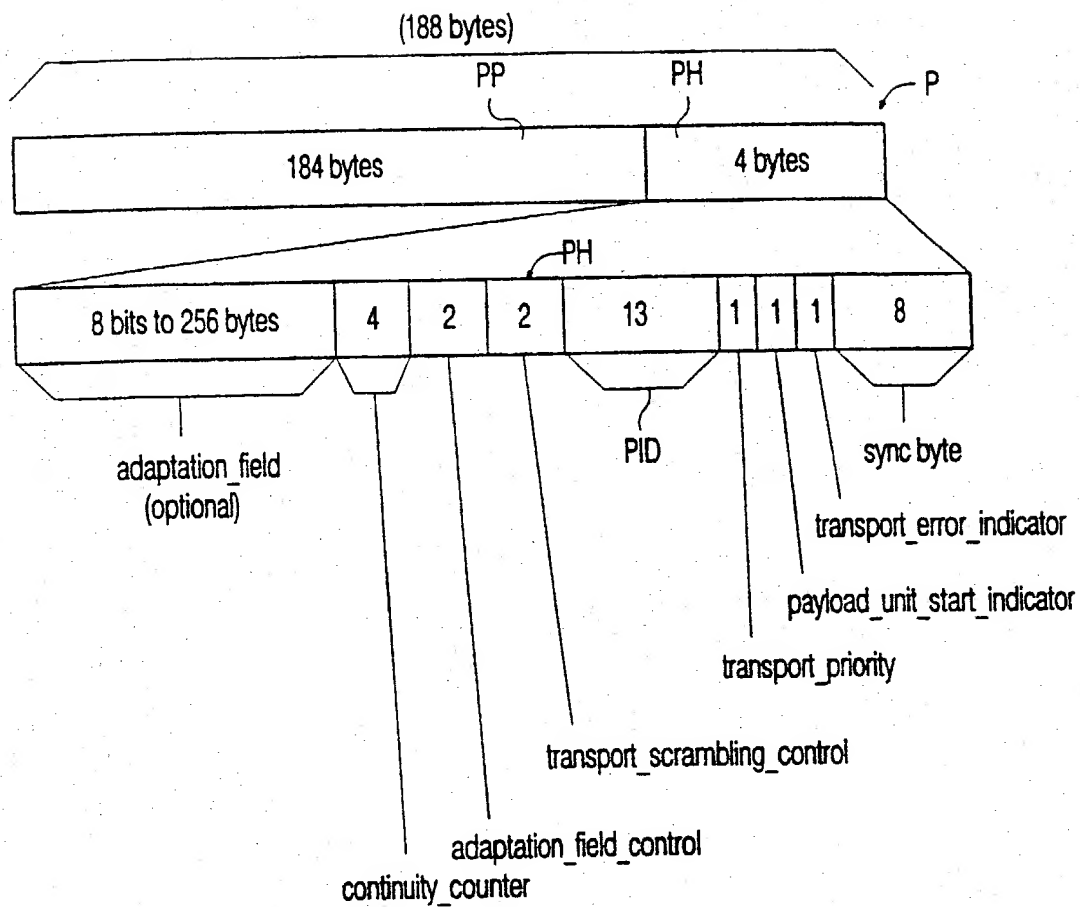


FIG. 3

4/4

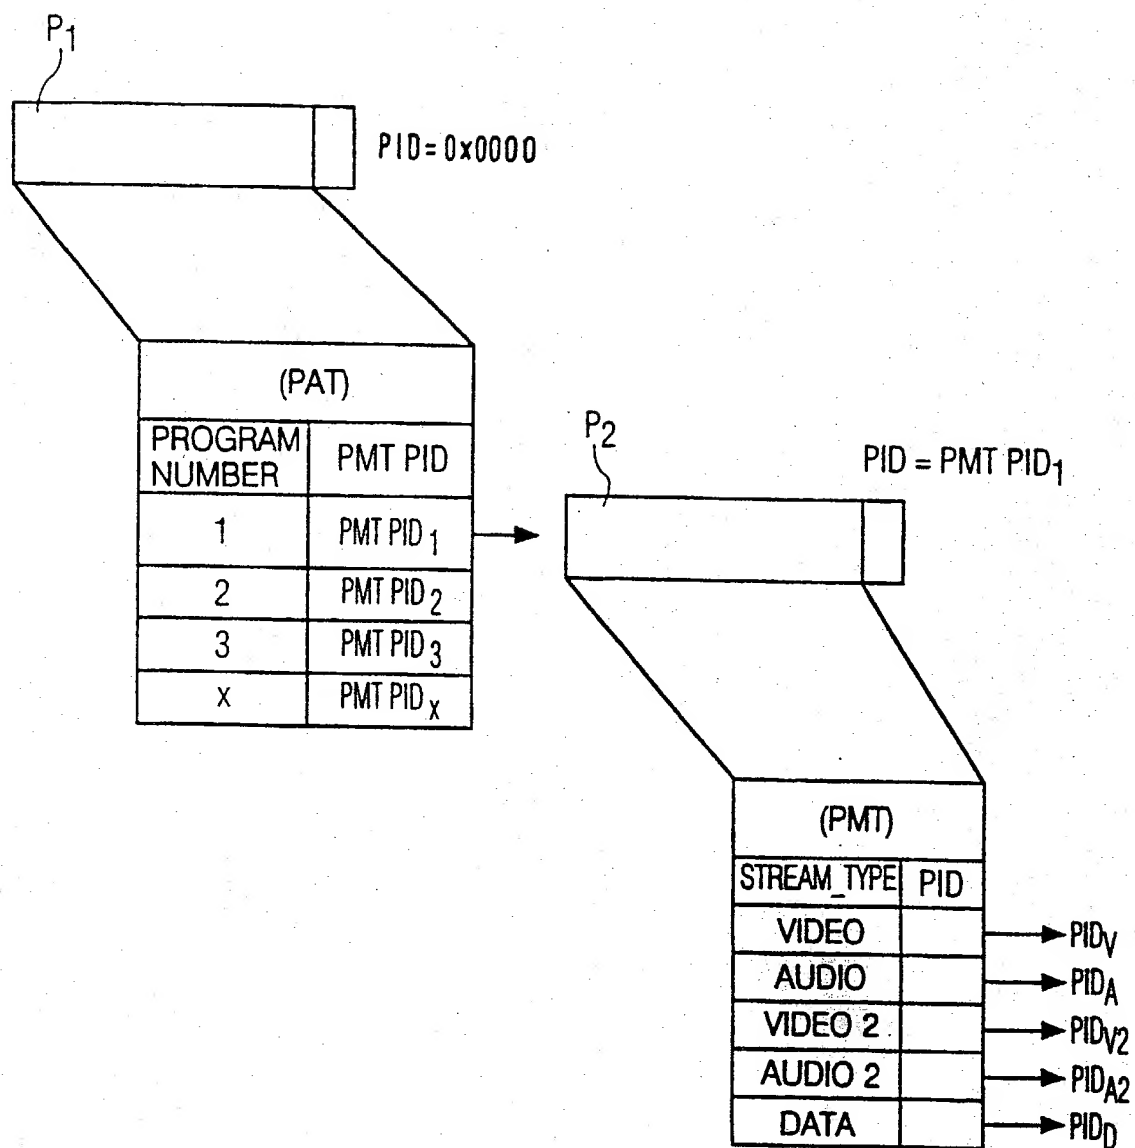


FIG. 4






## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H04N 5/44, 5/00, 7/50</b>		<b>A3</b>	(11) International Publication Number: <b>WO 98/30023</b>
			(43) International Publication Date: 9 July 1998 (09.07.98)
(21) International Application Number: PCT/IB97/01599		(81) Designated States: CA, CN, JP, KR, MX, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 24 December 1997 (24.12.97)			
(30) Priority Data: 08/773,156 26 December 1996 (26.12.96) US		Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	
(71) Applicant: PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).		(88) Date of publication of the international search report: 17 September 1998 (17.09.98)	
(71) Applicant (for SE only): PHILIPS NORDEN AB [SE/SE]; Kottbygatan 7, Kista, S-164 85 Stockholm (SE).			
(72) Inventor: CUCCIA, David; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).			
(74) Agent: SCHMITZ, Herman, J. R.; Internationaal Octrooibureau B.V., P.O. Box 220, NL-5600 AE Eindhoven (NL).			

(54) Title: FAST EXTRACTION OF PROGRAM SPECIFIC INFORMATION FROM MULTIPLE TRANSPORT STREAMS

## (57) Abstract

A digital TV receiver suffers from latency when a channel change is made to a program in an other than the currently accessed transport stream (TS). That is because the transport decoder (202) must first acquire and decode the Program Specific Information (PSI) from the transport stream, such as the Program Association Table and Program Map Table. In accordance with the invention, a pre-decoder (203) is successively coupled to the other transport streams through a cross bar switch (204) to extract the PSI from said other streams and create a map of channels.

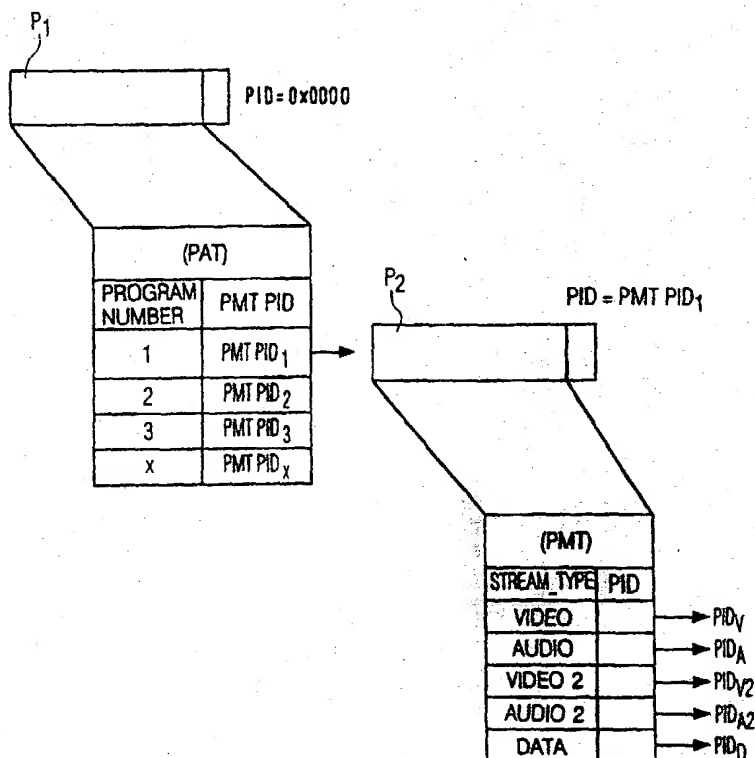

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakhstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LI	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 97/01599

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04N 5/44, H04N 5/00, H04N 7/50  
According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5477263 A (DANIEL O'CALLAGHAN ET AL), 19 December 1995 (19.12.95), column 4, line 35 - column 5, line 3; column 5, line 40 - line 46; column 6, line 23 - column 7, line 30, column 8, line 14 - column 8, line 51 --	1-15
A	WO 9637999 A1 (SCIENTIFIC-ATLANTA, INC.), 28 November 1996 (28.11.96), see the summary --	1-15
A,P	EP 0751680 A2 (MATSUSHITA ELECTRIC INDUSTRIAL CO. LTD.), 2 January 1997 (02.01.97), page 8, line 1 - line 31; page 8, line 50 - page 9, line 15; page 9, line 40 - line 54, see the summary --	1-15

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

22 July 1998

Date of mailing of the international search report

27-07-1998

Name and mailing address of the ISA:

Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Michel Gascoin  
Telephone No. +46 8 782 25 00

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 97/01599

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5594492 A (DANIEL O'CALLAGHAN ET AL), 14 January 1997 (14.01.97), column 5, line 1 - line 8, figure 4, abstract  --	1-15
A	US 5600378 A (ANTHONY J. WASILEWSKI), 4 February 1997 (04.02.97), see the summary  --	1-15
A	WO 9746009 A1 (THOMSON CONSUMER ELECTRONICS, INC.), 4 December 1997 (04.12.97), page 10, line 17 - page 12, line 19, abstract  -- -----	1-15

# INTERNATIONAL SEARCH REPORT

Information on patent family members

30/06/98

International application No.

PCT/IB 97/01599

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5477263 A	19/12/95	US 5594492 A	14/01/97
WO 9637999 A1	28/11/96	AU 5870896 A	11/12/96
		EP 0827669 A	11/03/98
		US 5600378 A	04/02/97
EP 0751680 A2	02/01/97	CN 1142726 A	12/02/97
		JP 9009156 A	10/01/97
		JP 9130764 A	16/05/97
US 5594492 A	14/01/97	US 5477263 A	19/12/95
US 5600378 A	04/02/97	AU 5870896 A	11/12/96
		EP 0827669 A	11/03/98
		WO 9637999 A	28/11/96
WO 9746009 A1	04/12/97	AU 3150797 A	05/01/98
		AU 3150897 A	05/01/98
		AU 3209497 A	05/01/98
		AU 3213297 A	05/01/98
		AU 3213397 A	05/01/98
		WO 9746007 A	04/12/97
		WO 9746008 A	04/12/97
		WO 9746010 A	04/12/97
		WO 9746017 A	04/12/97

**THIS PAGE BLANK (USPTO)**